




# product\_datasheet\_title

## SMART+ Wifi Brick Wall Wide UpDown RGB + W

Smart+ Brick Multicolor | Luminaire with WIFI technology

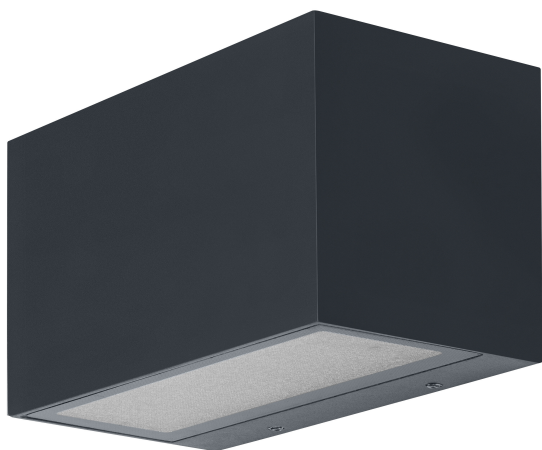

## technical\_data

## ELECTRICAL DATA

Nominal wattage	14.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	101.000 mA
Inrush current	3 A
Power factor $\lambda$	$\geq 0.5$
Total harmonic distortion	< 20 %
Protection class	I
Operating mode	Mains voltage

## PHOTOMETRICAL DATA

Luminous flux	600 lm
Total luminous flux of contained light sources	1350 lm
Luminous efficacy	43 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	$\geq 80$
Standard deviation of color matching	< 6 sdc <sub>m</sub>
Flickering metric (Pst LM)	$\leq 1$ %
Stroboscope effect metric (SVM)	$\leq 0.4$
Photobiological safety group acc. to EN62778	RG0
Photobiological safety group acc. to EN62471	RG0
Beam angle	290 °

## DIMENSIONS &amp; WEIGHT

Length	145.00 mm
Width	75.00 mm
Height	85.00 mm
Product weight	692.00 g

SMART OUTD WIFI BRICK WIDE  
RGBW

## MATERIALS & COLORS

Product color	Dark gray
Housing color	Dark gray
Body material	Aluminum
Cover material	Polycarbonate (PC)
Mercury content	0.0 mg

## APPLICATION & MOUNTING

Ambient temperature range	-20...+40 °C
Temperature range at storage	-20...+80 °C
Type of connection	Terminal, 3-Pole (L, N, PE)
Type of protection	IP44
Protection class IK (shock resistance)	IK03
Dimmable	yes
Type of dimming	WiFi
Mounting type	Surface
Mounting location	Wall
Application environment	Outdoor
LED module replaceable	Not replaceable
With light source	Yes

## LIFESPAN

Lifespan L70/B50 at 25 °C	25000 h
Number of switching cycles	12500

## EMERGENCY LIGHTING




Integrated test switch	No
------------------------	----

## CERTIFICATES & STANDARDS

Standards	CE / UKCA
Luminaire with limited surface temperature, "D sign"	No

---

[download\\_data](#)

Documents and certificates		document_name
	User instruction	SMART WIFI BRICK
	Declarations Of Conformity CE	EC_SMART OUTD WIFI
	Declarations Of Conformity UKCA	SMART WIFI

### logistical\_data

product_code	packaging_unit	dimensions	weight	volume
4058075564404	Folding box 1	152 mm x 92 mm x 87 mm	803.00 g	1.22 dm <sup>3</sup>
4058075564411	Shipping box 4	200 mm x 170 mm x 198 mm	3407.00 g	6.73 dm <sup>3</sup>

logistical\_data\_text

### disclaimer\_title

disclaimer\_text